


DESCRIPTION / FEATURES:

- Mini LC Unibody Connector with reduced center spacing for high density applications
- The Mini LC Connector features a removable duplex yoke with “finger friendly” trigger.
- This connector design is compatible with mini SFP + transceivers with 5.25mm centerline spacing.
- A one-piece molded body (Unibody) for enhanced reliability
- Available in SM and MM

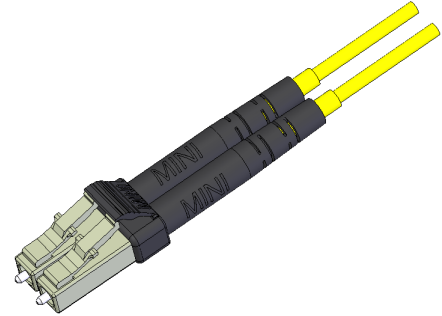

PERFORMANCE / RELIABILITY:

- Meets UL 94 V-0
- RoHS Compliant
- Durability: 200 Cycles
- Mating durability change $\leq 0.5\text{dB}$
- Operating temperature: $-40 +75\text{ }^\circ\text{C}$
- Temperature stability $\leq 0.25\text{dB}$

ORDERING PART NUMBER:

Part Number	Part Description
OG1LM1-E1EWHB	Mini LC Connector Kit, MM, 127.0 μm , 2mm



PRODUCT DIMENSIONS:

